


# FLUE INSTALLATION FOR FULL MASONRY CHIMNEY

## NOTES:

- [1] Determine height of deflector to suit brick course and cut starter flue to achieve setup as per drawing.
- [2] Fit flue adaptor into cast iron collar of firebox gather. Fit starter flue (with gussets) into flue adaptor. Drill through collar and secure with stainless steel screws or rivets x 3.
- [3] All stainless steel inner flues must be joined using stainless steel pop rivets.
- [4] Set deflector plate into course of brickwork by approx 30mm to ensure good seat. The plate also rests on the top of the starter flue gussets.
- [5] Place rockwool blanket (aluminium side down) on top of deflector plate ensuring complete coverage up to sides of brick enclosure and a neat fit around the active flue.
- [6] At the termination height of the flue the active stainless steel inner must be 30mm higher than the top of the chimney plate. The stainless steel skirt is screwed to the crimp of the chimney plate. The stainless steel cowl slides into the neck of the skirt and must locate inside the active flue below. No fixing is to be done to the cowl.
- [7] For exempt model heat transfer is required as per product instruction details.

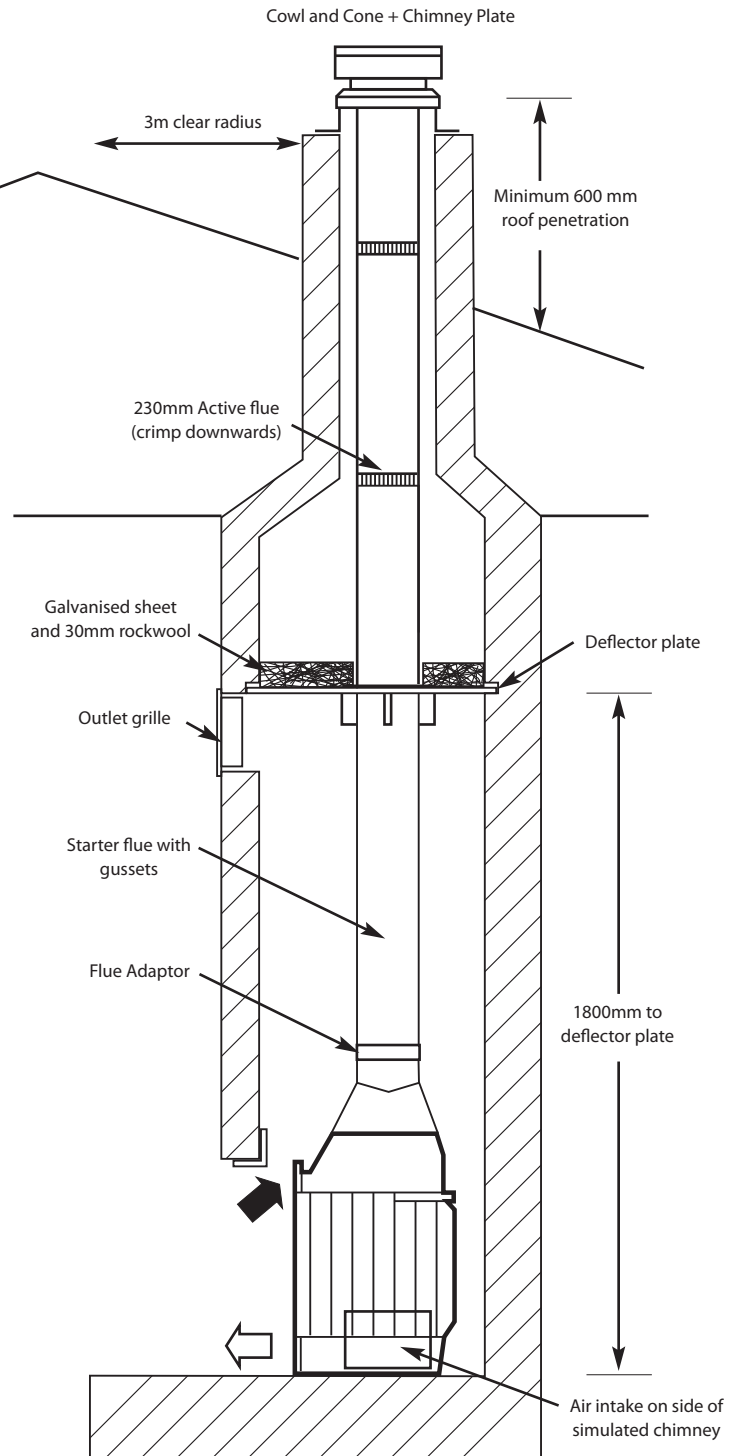

**IMPORTANT:** Appliance and Flue kit to be strictly installed in accordance to AS/NZS 2918:2001 and the appropriate requirements of the relevant codes. Installer to be a qualified licensed person.

**CHEMINÉES  
PHILIPPE  
AUSTRALIA**

430 Johnston St., Abbotsford, Victoria 3067 Phone: 03 9417 3315  
e-mail: sales@wignells.com.au www.chemphilaust.com.au